

PCBs

Column: **TRB-5MS**, P/N TR-520262

Size: 60m x 0.25mm x 0.25 μ m


Injection: 1 μ L standard mixture of 14 PCBs in isooctane (2ppm), splitless 60s, 270 $^{\circ}$ C

Carrier Gas: He, 1mL/min

Program temperature: 70 $^{\circ}$ C (1min) @ 30 $^{\circ}$ C/min a 130 $^{\circ}$ C @ 2.5 $^{\circ}$ C/min a 300 $^{\circ}$ C (15min)

Detector: MS KONIK-TECH, Mode EI+ (70 eV), SIM m/z 186, 222, 292, 326, 360, 394, 430, 464, 498 (50 ms), Source Temperature 140 $^{\circ}$ C, Interface temperature 300 $^{\circ}$ C, Photomultiplier 1000V.

Chromatogram provided by José Antonio Muñoz from KONIK-TECH, S.A

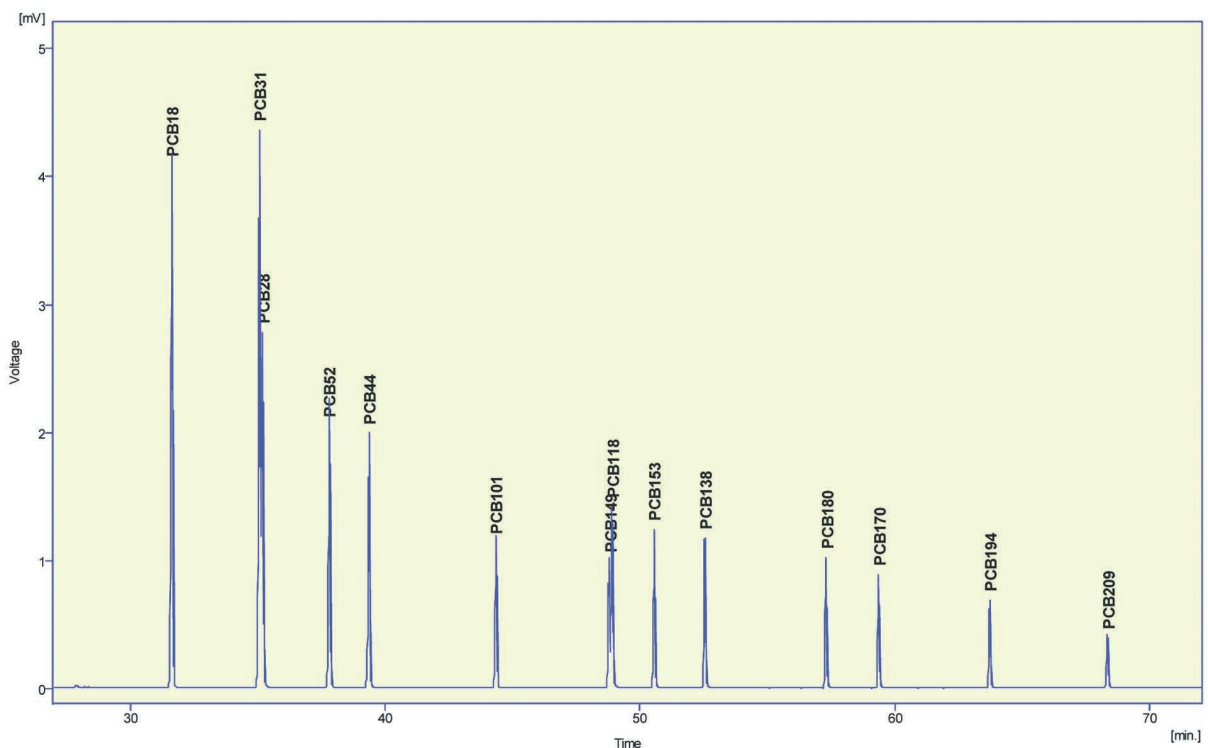

TKG 1222

www.teknokroma.com

Teknokroma S. Coop. C. Ltda. - Camí de Can Calders, 14 - 08173 Sant Cugat del Vallès (Barcelona) Spain
Tel: +34) 936 748 800 Fax: +34) 936 752 405 e-mail: comercial@teknokroma.es