

## AROCLOR 1242 IN ISOCTANE (10 PPM)

Column: **TRB-5MS**, P/N TR-520262

Size: 60m x 0.25mm x 0.25 $\mu$ m


Injection: splitless 60s, 270°C

Sample: 1  $\mu$ L Aroclors 1242, 1254 and 1260 standards in isooctane (10ppm), (1 ppm PCB30 and PCB209 internal standards)

Carrier Gas: He, 1mL/min

Program temperature: 70°C (1min) @ 30°C/min to 130°C @ 2.5°C/min to 300°C (15min)

Detector: MS KONIK-TECH, Modo EI+ (70 eV), SIM m/z 186, 222, 292, 326, 360, 394, 430, 464, 498 (50 ms), Source 140°C, Interface 300°C, Photomultiplier 1000V.

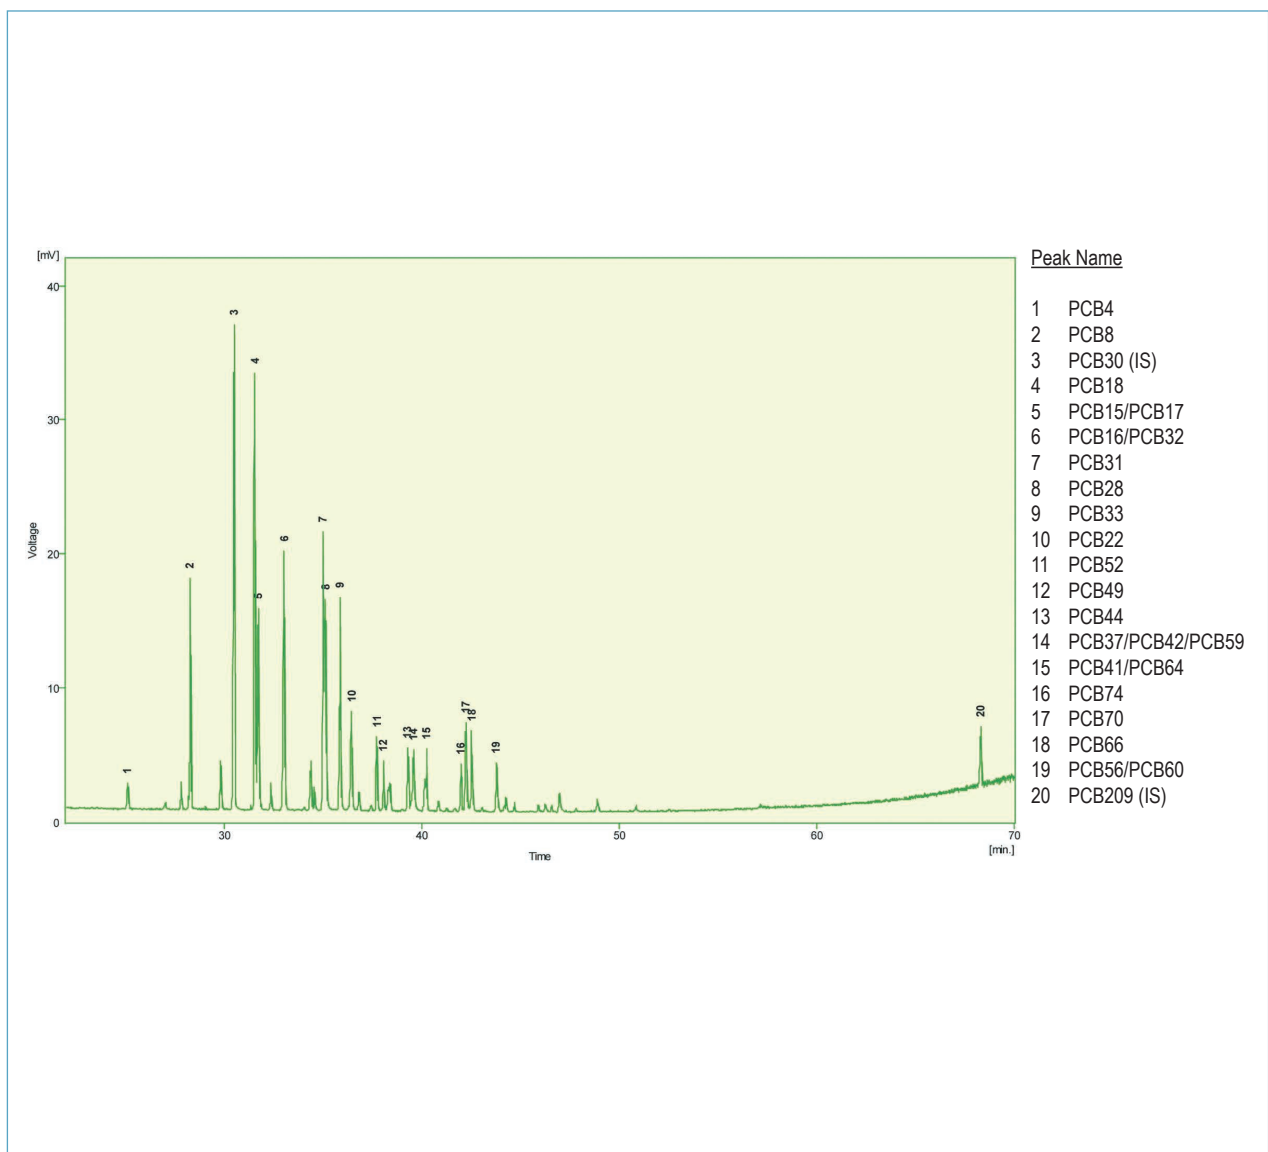

TKG 1227

[www.teknokroma.com](http://www.teknokroma.com)

Teknokroma S. Coop. C. Ltda. - Camí de Can Calders, 14 - 08173 Sant Cugat del Vallès (Barcelona) Spain  
Tel: +34) 936 748 800 Fax: +34) 936 752 405 e-mail: [comercial@teknokroma.es](mailto:comercial@teknokroma.es)