


SEPARATION IMPURITIES OF BUTYL ACRYLATE

Column: **TRB-1**, P/N TR-111052
Dimensions: 50m x 0.25mm x 1.0µm
Injection: 0.2µL solvent mixture, split 1:50, 280°C
Carrier gas: He, constant pressure 20 psi (137.8 KPa).
Oven program: 140°C (Isothermal)
Detector: FID, 300°C

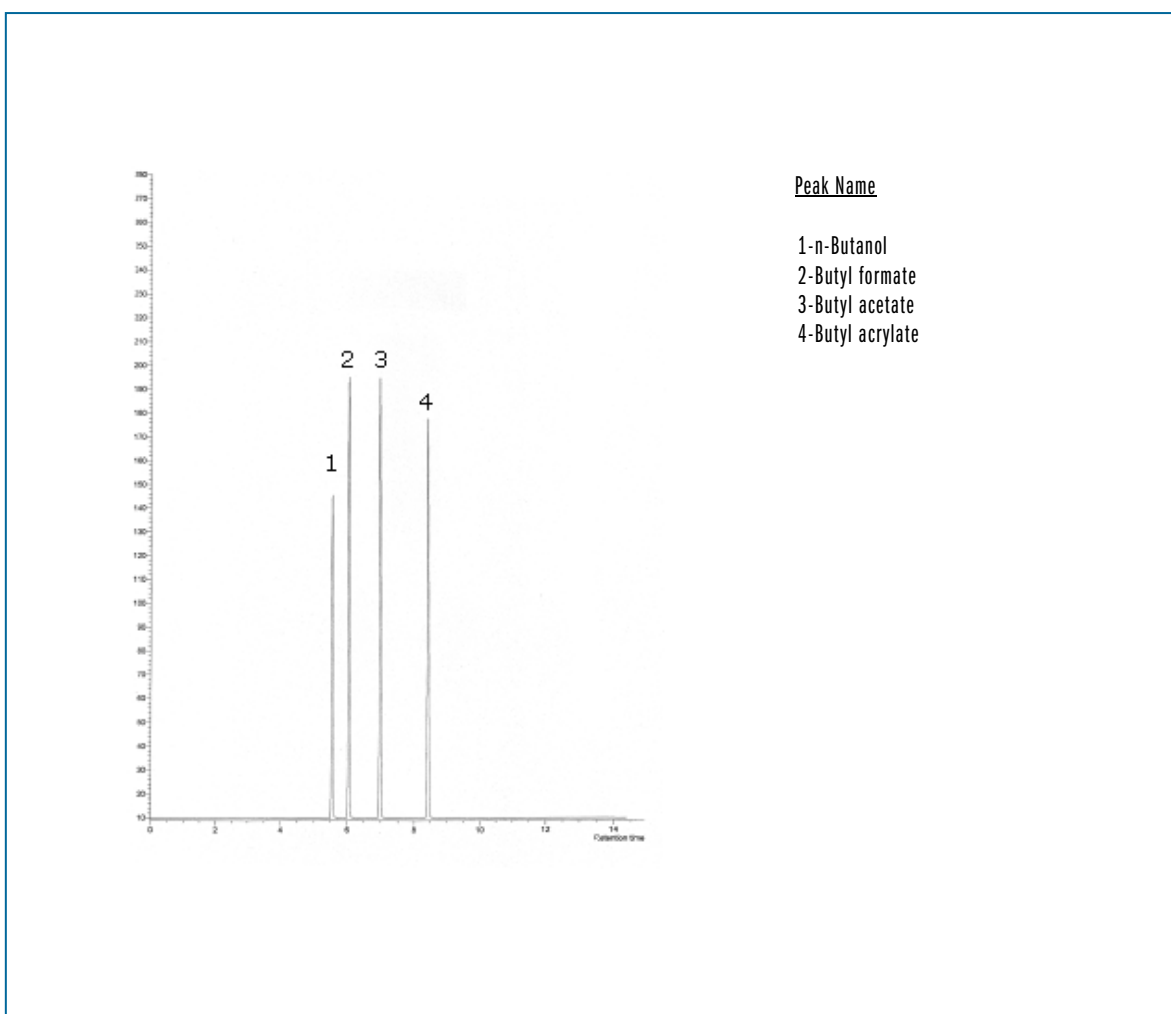

TKG 1056