


IMPURITIES OF n-BUTANOL

Column: **TRB-5**, P/N TR-120232
Dimensions: 30m x 0.25mm x 0.25µm
Injection: 1µL n-Butanol, split 1:20, 250°C
Carrier gas: He, constant flow 1 mL/min
Oven temperature: 40°C @ (5min) @ 4°C/min to 200°C @ 15°C/min to 300°C
Detector: MS, 280°C (interphase)

Chromatogram provided by F. Sisteré from IUCT

Peak Name

1-Butyl acetate
2-Xylene
3-n-Butylether4-
4-Heptanol
5-Isobutylether
6-2-Ethylhexanal
7-Butyl butyrate

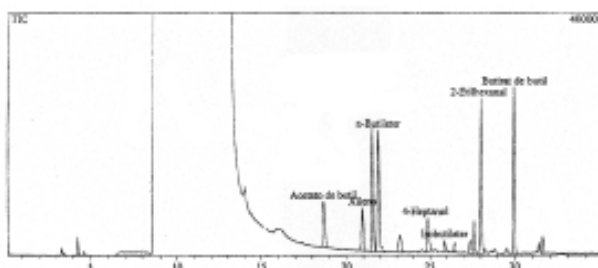

TKG 1035

www.teknokroma.com

Teknokroma S. Coop. C. Ltda. - Camí de Can Calders, 14 - 08173 Sant Cugat del Vallès (Barcelona) Spain
Tel: +34) 936 748 800 Fax: +34) 936 752 405 e-mail: comercial@teknokroma.es