


## Alcohol Impurities

Column: **TRB-624**, P/N TR-601462  
 Dimensions: 60 m x 0.25 mm x 1.4  $\mu$ m  
 Injection: 0.2  $\mu$ l Standard TK (4ng each compound) , split 50:1, 260°C  
 Carrier gas: He, 26.9cm/s (40°C)  
 Oven temperature: 40°C (12min) @ 10°C/min to 240°C (10min)  
 Detector: FID, 260°C

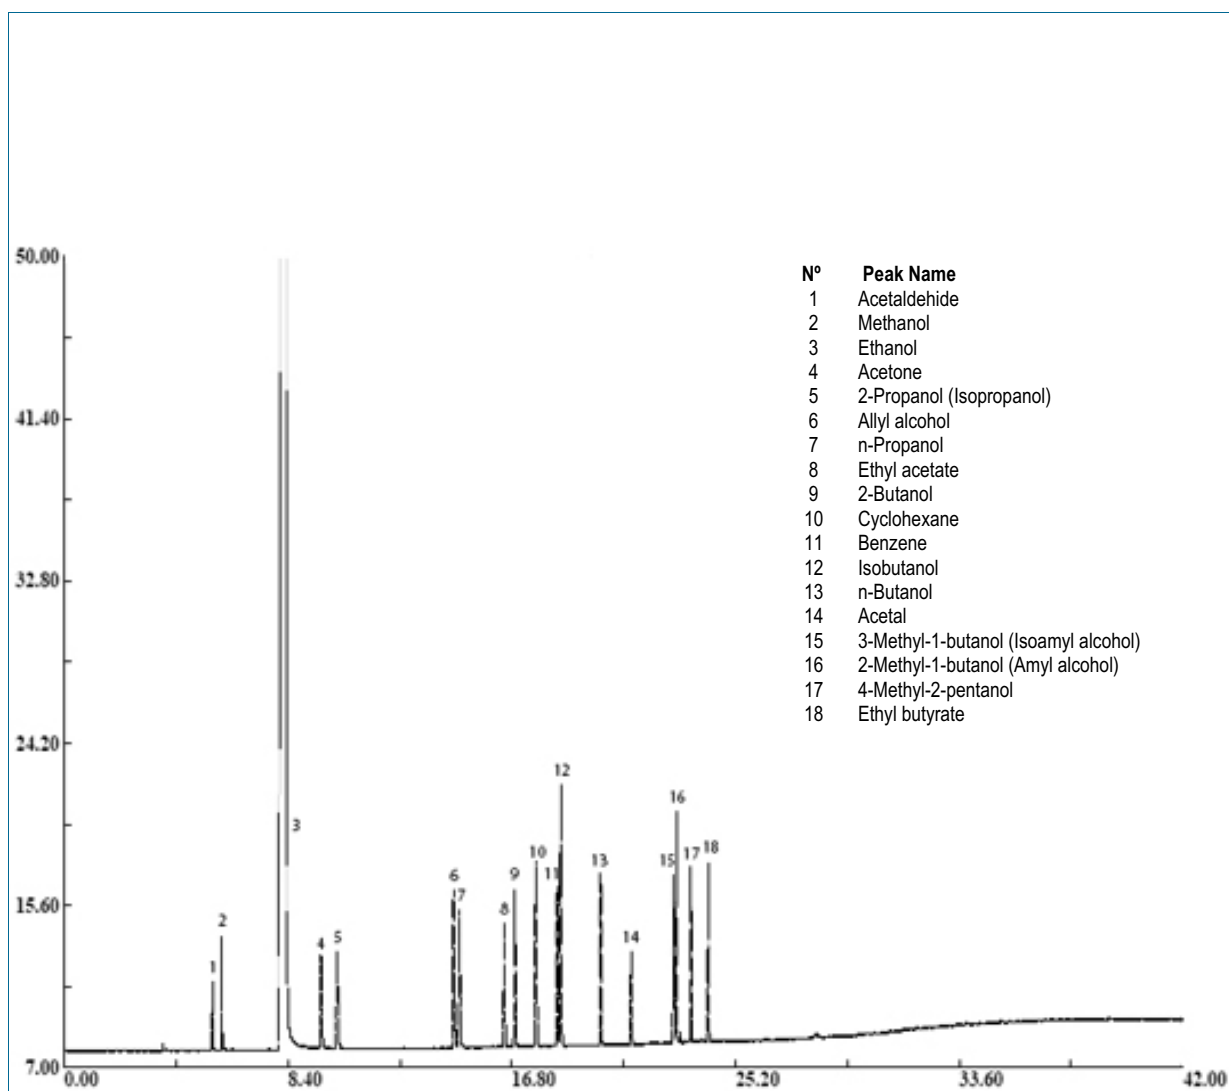

TKG 1263